


# ESPECIFICACIONES TÉCNICAS

## Cédula 40

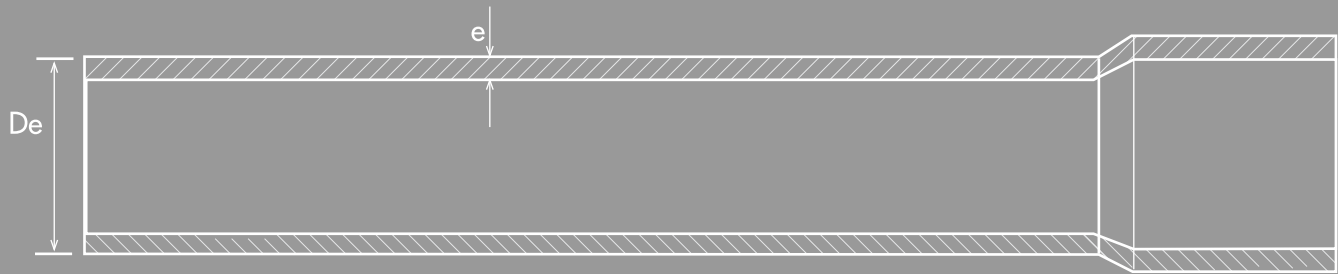

ASTM D1785

NMX-E-224

CÓDIGO	DIÁMETRO NOMINAL		DIÁMETRO EXTERIOR	ESPESOR DE PARED	PRESIÓN MÁXIMA DE TRABAJO	LONGITUD	PESO/TRAMO
	pulgadas	mm	mm	mm	(kgf/cm <sup>2</sup> )	m	m
05-40-005	1/2"	13	21.30	2.8	41	6.0	3.08
05-40-007	3/4"	19	26.70	2.9	33	6.0	4.11
05-40-010	1"	25	33.40	3.4	31	6.0	6.07
05-40-012	1 1/4"	32	42.20	3.6	26	6.0	8.27
05-40-015	1 1/2"	38	48.40	3.7	23	6.0	9.82
05-40-020	2"	50	60.30	3.9	19	6.0	13.10
05-40-025	2 1/2"	60	73.00	5.2	21	6.0	20.99
05-40-030	3"	75	88.90	5.5	18	6.0	27.31
05-40-040	4"	100	114.30	6.0	15	6.0	38.69
05-40-060	6"	150	160.30	7.1	12	6.0	68.14
05-40-080	8"	200	219.10	8.2	11	6.0	104.68
05-40-100	10"	250	273.10	9.3	10	6.1	148.50
05-40-120	12"	300	323.90	10.3	9	6.1	195.52
05-40-140	14"	355	355.00	355.6	9	6.1	231.47
05-40-160	16"	400	400.00	406.4	9	6.1	302.65